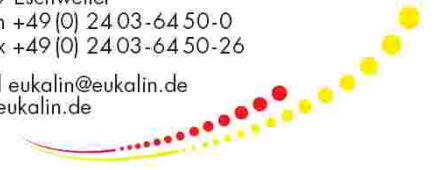

Issue of 12.10.2015
replaces all earlier issues

EUKALIN

SPEZIAL-KLEBSTOFF FABRIK GMBH

Ernst-Abbe-Str. 10
52249 Eschweiler
Telefon +49 (0) 24 03-64 50-0
Telefax +49 (0) 24 03-64 50-26

E-Mail eukalin@eukalin.de
www.eukalin.de



Data sheet

Hot melt adhesive EUKALIN 615 VB

EUKALIN 615 VB is a blend of resins, waxes and a polymer.

Application

The product is suited for gluing different materials or for the production of coatings. More detailed information about possible applications is available on request in written form or from our technical service.

Technical data and working instructions

Viscosity (160 °C) Brookfield	1300 mPa*s +-260mPas
Density:	0,92 +- 0,1 g/ml
Colour:	white
Open time:	long
Working temperature:	170°C
Storage:	in closed original container at temperatures lower than 30°C up to 12 months after date of shipping.

This information is based on the present state of our knowledge and does not imply any acceptance of liability for loss, damage or consequential loss arising directly or indirectly from the use of the information or the use of the Company's products described herein. No warranty is given or implied that use of the information or any such product does not infringe the proprietary rights of any third party. Users are solely responsible for any use made of the product and should therefore satisfy themselves by appropriate trials that the product to be used is suitable for the intended use and that such use will not infringe any proprietary rights of any third party. Avoid heating above the recommended temperature to avoid degradation. Smoke must be sucked off.