

---


Issue of 02.09.2015  
replaces all earlier issues

---

**EUKALIN**

**SPEZIAL-KLEBSTOFF FABRIK GMBH**

Ernst-Abbe-Str. 10  
52249 Eschweiler  
Telefon +49 (0) 24 03-64 50-0  
Telefax +49 (0) 24 03-64 50-26  
E-Mail [eukalin@eukalin.de](mailto:eukalin@eukalin.de)  
[www.eukalin.de](http://www.eukalin.de)

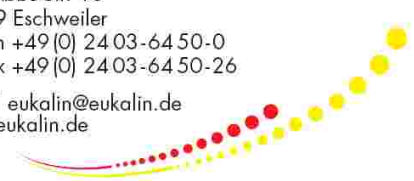

## Data sheet

### Synthetic resin adhesive EUKALIN 6462 VL

EUKALIN 6462 VL is a water based synthetic resin dispersion.

### Application

The product is suited for gluing different materials or for the production of coatings. More detailed information about possible applications is available on request in written form or from our technical service.

### Technical data and working instructions

Viscosity at prod. Brookfield 20 rpm, 20°C	5500 mPa*s +- 10%
Solid matter	53 +- 3 %
Density	1,08 +- 0,1 g/ml
Colour	white
Dilution	possible with water
Storage	in closed original container at 10-30 °C 6 months after date of shipment do not store below 0°C use at ambient temperature

Previous information is based on our practice oriented experience and is made to the best of our knowledge. It does not present any guarantee concerning condition. Due to the different materials and the working conditions beyond our influence we recommend conducting sufficient self tests in any case, as well as contacting our application services. Because of the above mentioned reasons we are not liable - despite in case of intention, gross negligence or injuries to life, body or health - for the correctness of the above mentioned information as well as for otherwise given advices.